
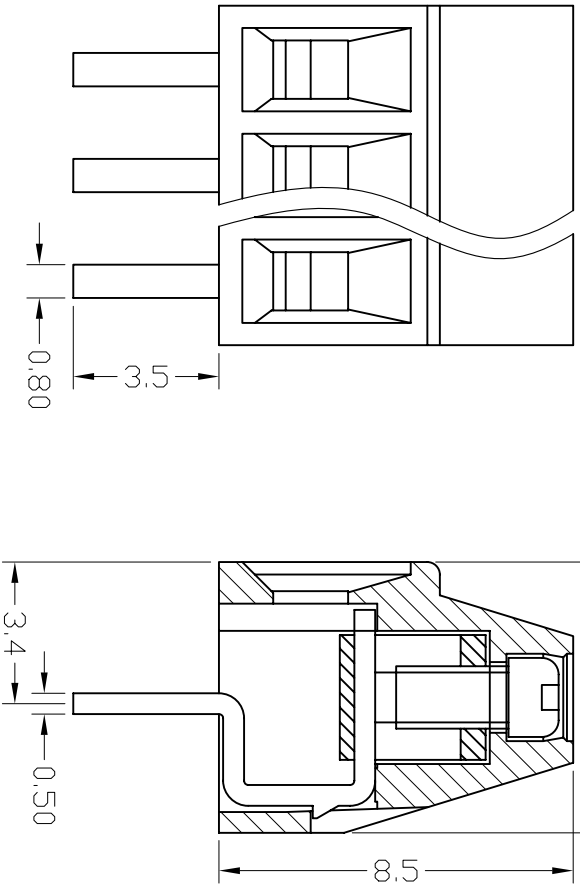


150V 6A 26-18AWG 1.0mm²
 Poles: 2P&3P-12P
 Pitch: 2.54mm (.100")

Materials

Housing: PA66 (UL 94V-0)
 Solder Pin: Brass, Tin Plated
 Wire Cage: Brass, Nickel Plated
 Screw: M1.6, Steel (A3), Zinc Plated
 Torque: 0.1N.m

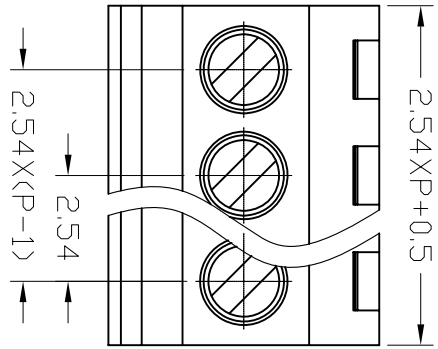

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X . ±0.2 .X ±0.1 .XX ±0.05 .XXX ±0.01

<p>新莱亚电子 XINLEIYA ELECTRONIC CO., LTD</p>	图名/Title	文件编号/File No.	页序/Sheet	单位/Units: mm
	XY308-2.54 产品图	QJ/YT-2251100		
备注/Remark				