

HDS-Series – Solder Cup



Material Specification:

Insulator: Glass filled Polyester, Black
UL94 V-0

Shell: Stamped Steel, Tin Plated

Contacts: Copper Alloy
Class 3: 100 inserts min.


Contact Plating: Selective Gold over Nickel

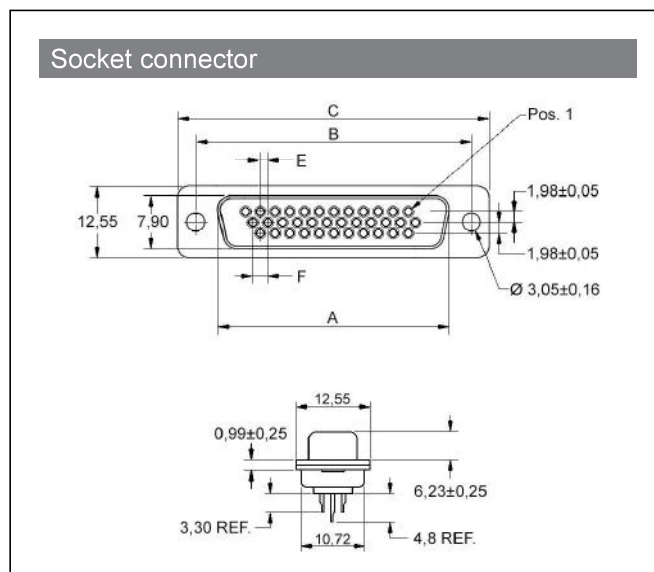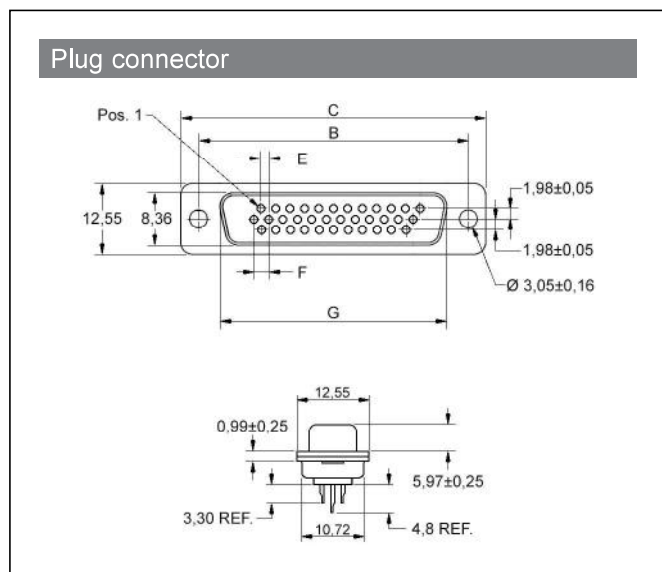

| Size | A | B | C | E | F | G |
|------|-------|-------|-------|-------|------|-------|
| HD15 | 16,33 | 24,99 | 30,81 | 1,145 | 2,99 | 16,62 |
| HD26 | 24,66 | 33,32 | 39,14 | 1,145 | 2,99 | 25,25 |
| HD44 | 38,38 | 47,04 | 53,04 | 1,145 | 2,99 | 38,96 |
| HD62 | 54,84 | 63,50 | 69,32 | 1,205 | 2,41 | 55,25 |

Size 78 available on request.

Order Codes - Standard Type - with Ø 3.05mm Through Hole

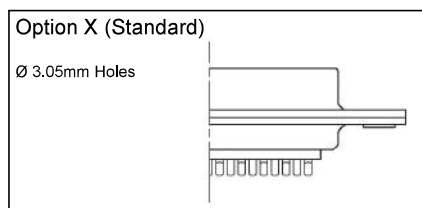

| Plug Connector | | |
|----------------|--------------|-------------|
| 15 | 2101-0300-01 | HDS-15-MTBS |
| 26 | 2101-0300-02 | HDS-26-MTBS |
| 44 | 2101-0300-03 | HDS-44-MTBS |
| 62 | 2101-0300-04 | HDS-62-MTBS |
| 78 | On request | |

| Socket Connector | | |
|------------------|--------------|-------------|
| 09 | 2101-0300-11 | HDS-15-FTBS |
| 15 | 2101-0300-12 | HDS-26-FTBS |
| 25 | 2101-0300-13 | HDS-44-FTBS |
| 37 | 2101-0300-14 | HDS-62-FTBS |
| 78 | On request | |

