
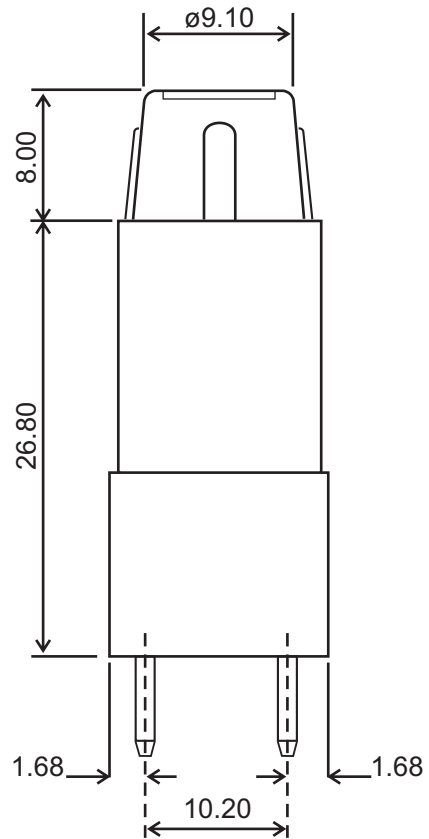


**Model PBF 2M**



**TECHNICAL SPECIFICATIONS :**

<b>Mounting Style</b>	: PCB Type
<b>Nominal Rating</b>	: 6.30A/250V
<b>Permissible Operating Temp</b>	: -20°C to +85°C
<b>Permissible Soldering Temp</b>	: 270°C for 5 sec max
<b>Moulded Material</b>	: PA 66 - UL94 V0 or V2 - Glass Filled
<b>Insulation Resistance</b>	: > 1000 M $\Omega$ @ 500 Vdc
<b>Contact Resistance</b>	: 10 m $\Omega$ max
<b>Terminal</b>	: Tin Plated Copper Alloy
<b>Approx Weight</b>	: 2.5 gms
<b>Fuse Link</b>	: 5 X 20 mm

**Approval Data**

CE :250V / 6.3A